



Request for Quote [RFQ]

HIGH EFFICIENCY AIR CURTAINS

Complete Form and Send To: design@infrasave.com | Fax: 1-866-724-9265

If possible, please send detailed picture[s] of door from the "inside" with the door closed

A summary of Infrasave Air Curtain series and models is on the next page.

Distributor Company Name:		Distributor Phone:
Distributor Contact Name:		Distributor E-Mail:
Company Name:		Date:
Contact:	Position:	Phone:
Street:		
City:	State/Prov:	Zip/Postal:
E-Mail:		Fax:
Project Name:		Project City:

Building Type [Please check one]	Warehouse / Industrial	Retail	Other [Specify in comments]
---	-------------------------------	---------------	------------------------------------

Voltage at Site [Please check one]	120V	208V	230V	480V	600V
---	-------------	-------------	-------------	-------------	-------------

Door Information	Door Size 1	Door Size 2	Door Size 3	Door Size 4
Quantity				
Door Type - [See below] SW, RE, SL, RU, HL				
Door Height [Feet]				
Door Width [Feet]				
Clearance above door opening [Inches]				
Clearance each side door opening [Inches] L / R	/	/	/	/
Mounting: [H Horizontal, or R Recessed, or V Vertical]				
Number of hours/day facility operates				
Approx. # of hours/day door is open				
Door faces Compass Direction [North, South, East or West = N, S, E, W]				
Building Negative Air Condition [Yes / No]				

Comments:


Service Window [SW]




Retail Entryway [RE]




Standard Lift Door [SL]

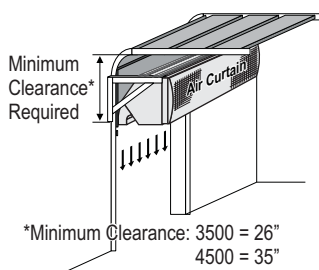


Roll Up Door [RU]

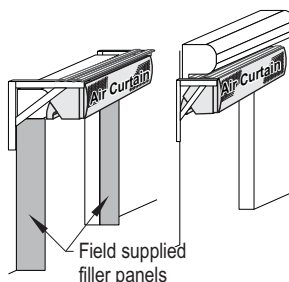

High Lift Door [HL]

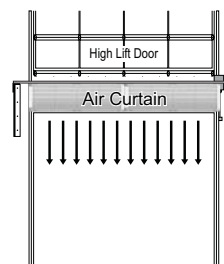

Vertical Air Curtain [Left or Right]

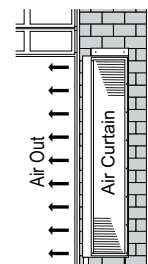

Infrasave Air Curtain Series & Model Summary

- Refer to product manuals for detailed information

COMMERCIAL / RETAIL MODELS

Infrasave 500 Series Drive-Thru Window Air Curtains



- 2 Model Widths:
 - 23.6" [600 mm]
 - 31.5" [800 mm]
- 208V, 60Hz, 12A

Infrasave 1000Series 120Volt Entryway Air Curtains



- For door heights up to 7ft [2.1 m]
- 3 Model Widths:
 - 35.43" [900 mm]
 - 47.24" [1200 mm]
 - 70.87" [1800 mm]
- 120V, 60Hz

Infrasave 2000 & 2500 Series Entryway Air Curtains

- 2000 Series: Door heights up to 9'-10" [3m]
- 2500 Series: Door heights up to 11'-6" [3.5m]
- Location options: Surface Mount models or models for Recess Mount into ceiling
- Heat options: Electric; Hot water; or No heat - ambient air recirculation
- Electrical: Single Phase - 208V, 240V; Three Phase - 208V, 480V, 600V



Surface mount above doorway



Recess into ceiling

2000 Series Widths: 2500 Series Widths:

- | | |
|------------------|------------------|
| ■ 44.8" [1137mm] | ■ 51.2" [1300mm] |
| ■ 65.7" [1669mm] | ■ 71.9" [1825mm] |
| ■ 86.6" [2200mm] | ■ 92.5" [2350mm] |

2000R Series Widths: 2500R Series Widths:


- | | |
|------------------|------------------|
| ■ 47.6" [1209mm] | ■ 46.7" [1185mm] |
| ■ 63.4" [1609mm] | ■ 67.3" [1710mm] |
| ■ 83.5" [2120mm] | ■ 88.0" [2235mm] |

INDUSTRIAL / WAREHOUSE MODELS

Infrasave 3500 & 4500 Series Air Curtains


- Orientation Options: Horizontal mount above doorway, or vertical mount beside doorway
- Modular units stack together to cover required opening width or height
- 3500 Series: Door heights 10' to 19'-8" [3 to 6m]; widths up to 16' [5m]
- 4500 Series: Door heights 16' to 26'-3" [5 to 8m]; widths up to 24' [7.5m]
- Heat options: Hot water; or No heat - ambient air recirculation
- Electrical: 3500 Series: 240V Single Phase; 4500 Series: 480V Three Phase

Horizontal Unit
above doorway



Vertical Units: Left or right

- Air Intake right angle to wall

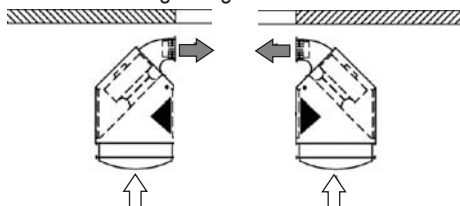

Vertical Units: Left or right

- Air Intake parallel to wall

