

Heating Models and Capacities

With smaller, sleeker profiles, **ES/ESD Series** heating systems offer a streamlined, yet effective heating solution for any indoor or outdoor space. They are available in a range of sizes, wattages and voltages that can provide appropriate warmth to any indoor or outdoor area, from a small room to an expansive open-air commercial space.



Multiple Voltages



Multiple Colors



Flush Mount



One Bulb, or Two



Features

- Models range from 500 to 6000 Watts
- Available in 120V, 208V, 240V, 277V, and 480V options for a wide range of applications.
- Flush Mount option to make heater blend in with any structure
- Single stage or 2 stage option for a high or low heat setting
- Stainless steel finish custom colors available in black, white, beige, and mineral bronze


Perfect for:








ES/ESD Series – Technical Specifications & Benefits Information below is intended only as a reference and should not be used when installing equipment. Please ensure you locate the most recent instruction manual for accurate and up to date information.

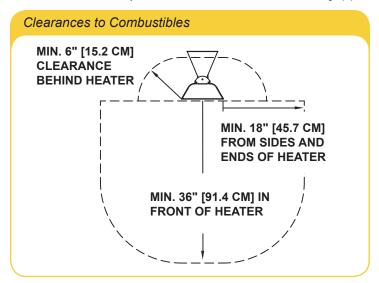

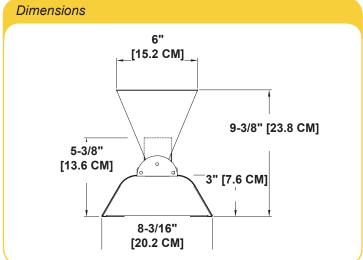

Specifications								
MODEL	WATTS	LENGTH	VOLTS/AMPS				PHASE	SHIP WGT.
ES-519	500	19.5"	120/4.2				Single	10
ES-719	750	19.5"	120/6.3				Single	10
ES-1033	1000	33"	120/8.3				Single	12
ES-1533	1500	33"	120/12.5	208/7	240/6.3		Single	12
ES-2039	2000	39"	208/10	240/8.3	277/7	480/4	Single	13
ES-2539	2500	39"	208/12	240/10.4	277/9	480/5	Single	13
ESD-3033	3000	33"	208/14	240/12.5	277/11	480/6	Single	13
ES-3061	3000	61.25"	208/14	240/12.5	277/11	480/6	Single	20
ESD-4039	4000	39"	208/19	240/16.7	277/14	480/8.3	Single	14
ES-4061	4000	61.25"	208/19	240/16.7	277/14	480/8.3	Single	20
ESD-5039	5000	39"	208/24	240/20.8	277/18	480/10.4	Single	14
ESD-6061	6000	61.25"	208/28.8	240/25	277/21.7	480/12.5	Single	21

Heater Controls

On/Off Control



- Designed for use with single bulb heaters
- Available in flush mount or surface mount options
- Available with no cover, weatherproof cover, or weatherproof box
- Range 120/277 VAC [20 amps max per switch]

Variable Control



- Designed for use with single bulb heaters up to 3000 watts [maximum 15 amps]
- Variable control to regulate heat output
- Each heater must have its own input regulator
- Available in flush mount or surface mount options
- Available with no cover, weatherproof cover, or weatherproof box
- Available for 240 V and 120V heaters only

2-Stage Control



- Designed for use with dual bulb heaters
- 2-stage option for high or low heat setting
- Range 120/277 VAC [20 amps max per switch]
- Available in flush mount or surface mount options
- Available with no cover, weatherproof cover, or weatherproof box



























