


4000 Series



Portable

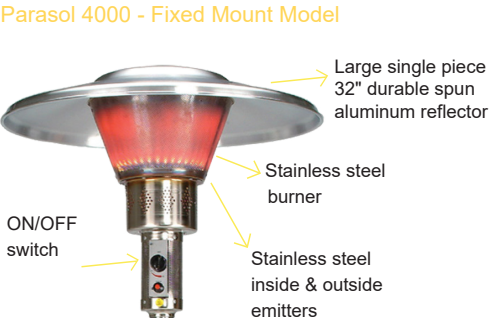

→ Features:

- Heavy duty stainless-steel construction commercial grade
- 38,000 input BTU/hr. Large reflector and conical shape burner puts similar heat on the floor as larger BTUH units – uses less fuel
- Mounting options include fixed mount and portable
- Control options include a variable switch
- Extra large propane tank container [20-30lbs], provides longer run times and fewer tank changeovers
- Dual conical-shaped stainless-steel mantel [heat exchanger] built for durability and shaped to focus radiant energy to the floor
- Easy portability
- Easy to use battery-powered spark ignition
- Safety tip switch
- One piece sturdy stainless steel pole mount for burner head
- Warranty 1-year [parts] and 3-year [burner and mantle]



→ Dimensions and specifications:

Portable:	FINISH	DIMENSIONS		INPUT BTU/hr	FUEL	GAS PRESSURE		INLET	GAS SUPPLY	WEIGHT LBS.
						MIN	MAX			
4005-CB	Stainless Steel	90"h	x 32"w	38,000	LP	11" w.c.	14" w.c.	QCC	20/30 lb. cylinder 60	
Fixed Mount:	FINISH	DIMENSIONS		INPUT BTU/hr	FUEL	GAS PRESSURE		INLET	GAS SUPPLY	WEIGHT LBS.
						MIN	MAX			
4SN5-CB	Stainless Steel	90"h	x 32"w	38,000	NG	5" w.c.	7" w.c.	1/2"	Piped from central supply	60

Parasol 4000 is design certified by CSA International for use outdoors in accordance with current ANSI standards. Infrasave warrants that the heater will operate as designed for wind conditions up to 10 MPH. Please note that adverse wind and weather conditions will reduce the effectiveness of any heating system.

Infrasave

1-706-554-6191
csr@infrasave.com
www.infrasave.com